
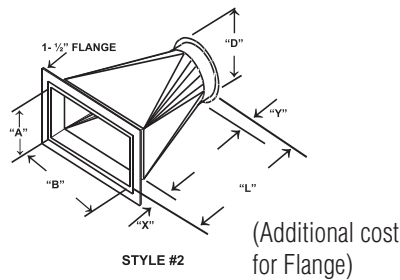



Nordfab Ducting Transition / Hood Styles

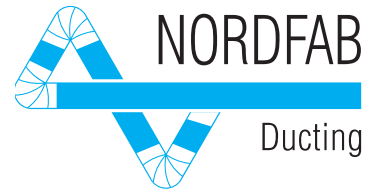

By default, X=2, Y=2, and B=L

- L must be at least 75% of B or it will be Square to Square.
- L of Square to Round (at least 7" minimum).
L of Square to Square (4" minimum).

Built to your specifications. Please list all required dimensions and details.

- Specify Rectangle End: Flanged Raw End I.D. Raw End O.D.
- Flange Type: Angle Bar Flat Bar Sheet Metal
- Specify Round End: QF Flanged Hose Conn. Raw I.D. Or O.D.

NOTE: If no hole pattern is supplied for flanges, they will be supplied "Blank" to be field drilled.

Item #	Qty.	D in	A in	B	X Std 2"	Y Std 2"	L	Gauge	Flange Material	Flg Dwg	Special Notes

Specify dimensions A, B, D, and L. Also available with flanged connections. Specify flange pattern. If no hole pattern is supplied for flanges, flange will be supplied blank to be field drilled.

Standard flange material is 1-1/2 x 3/16" THK angle. Diameter sizes exceeding 24" will be supplied with a flange. Standard length is equal to B dimension, unless otherwise specified or D dimension is greater. Prices are determined by the rectangular dimension of style 1. Add for Flange on style 2.

NOTE: Square to square transitions are made when the customer's specified length is less than 75% of the B dimension.